

Suspension points

The diagonally arranged threaded drill holes in the roller elements permit the use of this hardware system for sliding doors with a thickness of 19, 22, 25 and 30 mm ($\frac{3}{4}$ ", $\frac{55}{64}$ ", $\frac{63}{64}$ " and $1 \frac{3}{16}$ ").

Hardware system for inlaying sliding cabinet doors up to 40 kg (88 lbs.) or 70 kg (154 lbs.)

Description

The HAWA-208 40-70/IS is characterised by its combination of high strength and low installation height. The sliding doors are guided at one point at the bottom. The track stop with retainer can be adjusted to the corresponding door weight.


If heavy doors are required that are to be subjected to a great deal of use, we recommend using the HAWA-209 70/MS hardware system. With this system the sliding doors are guided at two points in a bottom guide channel.

Applications

This hardware system is ideal for use wherever heavy sliding doors are required to be moved with HAWA quality, e.g. in apartments, offices, hospitals, public buildings, the administration sector, etc.

Features of the HAWA-208 40-70/IS

- Two-wheeled trolley: for sliding doors with a weight up to 40 kg (88 lbs.)
- Four-wheeled trolley: for sliding doors with a weight up to 70 kg (154 lbs.)
- Door thicknesses 19, 22, 25 and 30 mm ($\frac{3}{4}$ ", $\frac{55}{64}$ ", $\frac{63}{64}$ " and $1 \frac{3}{16}$ ")
- Simple vertical adjustment
- Track stop plastic, with adjustable retainer

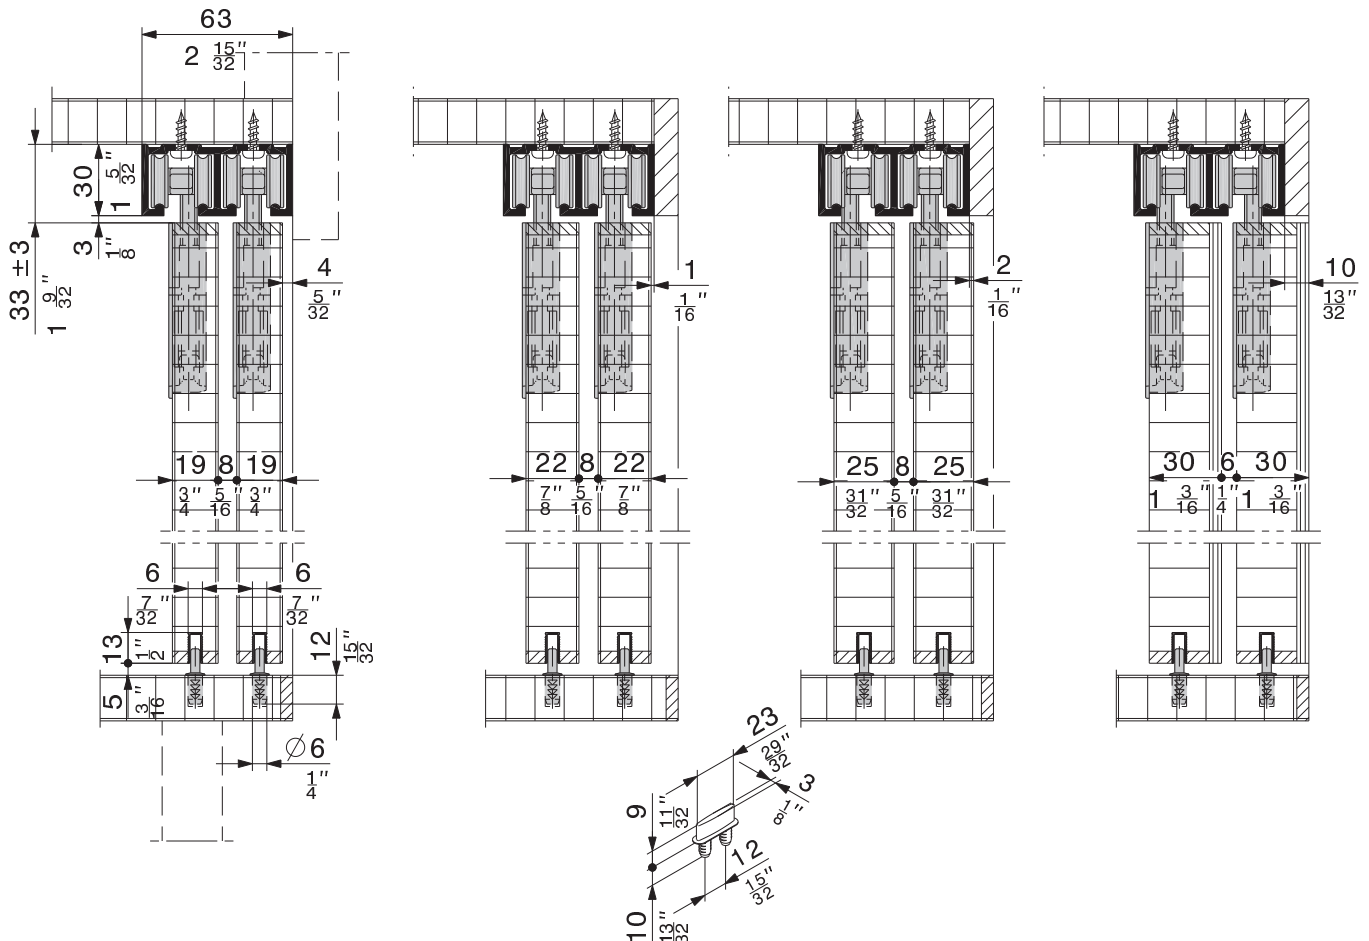


Subject to modification. Metric specifications are exact. Inches are approximate.

Sets without top tracks and guide channels


	panel	code
HAWA-208 40/IS (for sliding cabinet/wardrobe doors up to 40 kg [88 lbs.])	1	13116
	2	11683
	3	11685
HAWA-208 70/IS (for sliding cabinet/wardrobe doors up to 70 kg [154 lbs.])	1	13117
	2	11684
	3	11686

– For 4-panel sliding doors, two 2-panel sets must be ordered,
 – for 5-panel sliding doors, one 2-panel and one 3-panel set must be ordered,
 – for 6-panel sliding doors, sets of special assortment must be ordered.









Dual top tracks

Caution: Hole positions vary.		mm/inch	code
 Dual top track, alu plain anodized, predrilled	2500 (8'2 ²⁷ / ₆₄)	12199	
	3500 (11'5 ⁵¹ / ₆₄)	12200	
	6000 (19'8 ⁷ / ₃₂)	10166	
	cut to size	10169	


Single top tracks

Caution: Hole positions vary.		mm/inch	code
 Single top track, alu plain anodized, predrilled	6000 (19'8 ⁷ / ₃₂)	10162	
	cut to size	10164	

Set comprising

	13116	11683	11685	13117	11684	11686	code
 Two-wheeled trolley, M7, plastic-tyred ball bearing wheels (for sliding cabinet/wardrobe doors up to 40 kg [88 lbs.])	2	4	6	–	–	–	10373
 Four-wheeled trolley, M7, plastic-tyred ball bearing wheels (for sliding cabinet/wardrobe doors up to 70 kg [154 lbs.])	–	–	–	2	4	6	10374
 Concealed press-fit cup, with height adjustment bolt M7	2	4	6	2	4	6	10461
 Bottom guide alu, press-in type	1	2	3	1	2	3	10526
 Plug-in rubber door stop	1	2	2	1	2	2	10589
 Track stop plastic, with adjustable retainer	1	4	4	1	4	4	10602
 Suspension assembly locking wrench	1	1	1	1	1	1	10778
 Hex key 3 mm, short version	–	1	1	–	1	1	10785

Guide profiles

	mm/inch	code
 Guide profile, plastic brown, groove mounted	3000 (9'10 ⁷ / ₆₄)	10319
	6000 (19'8 ⁷ / ₃₂)	10313
	cut to size	10321

Order specifications

- Number and type of hardware sets
- Type and length of top track
- Type and length of bottom guide channel

Planning/installation

Please use for planning and execution the installation drawing code 12389. (→ www.hawa.ch → HAWA-Productfinder)